
Toilenator — Remove & Move Old Toilet



1. Place the toe of the hand truck under the base of the toilet. Front of bowl contacts the truck.



2. Pins out, crossbars free. Place the Toilenator hook inside the trap — end under and behind the back of the bowl.

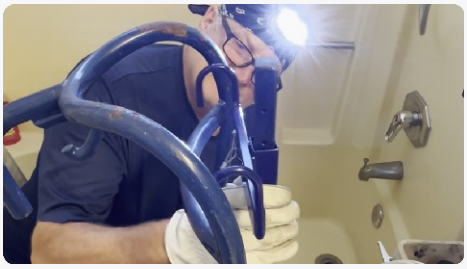

3. Lean the hook bar toward the truck. Pull the upper crossbar up and drop its hooks over the hand-truck crossbar.



4. Keep the hook fully seated. Pull up on the hook bar while pinning the upper crossbar.



5. Drop the bowl stabilizer bar as low as possible and pin it through the nearest hole.

You are now ready to pick up the toilet with your hand truck. As you do, verify the hook is fully engaged in the trap, and that the toilet is being held securely. The toilet may tend to lean over to one side. If connected correctly, it won't fall off.

Copyright 2026